


## ACOUSTIC FLOOR SLAB PLUS

November 2017

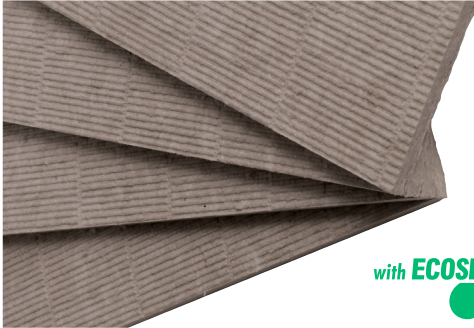

with **ECOSE** TECHNOLOGY

### APPLICATIONS



### DESCRIPTION

Acoustic Floor Slab Plus is an extra high dense rock mineral wool slab specifically designed to meet the requirements of a floating floor treatment for use in Robust Detail separating floors.

### PERFORMANCE

#### Fire

Classification: EUROCLASS A1 to BS EN 13501-1.

### BENEFITS


- ✓ Excellent acoustic and thermal performance
- ✓ Excellent compressive strength
- ✓ Easy to install

### SPECIFICATIONS

Thickness (mm)	Length (mm)	Width (mm)	Area per pack (m <sup>2</sup> )	NRC
50	900	600	5.94	0.89
25	900	600	2.70	

*All dimensions are nominal*

### CERTIFICATION



## ACOUSTIC FLOOR SLAB PLUS

November 2017

### ADDITIONAL INFORMATION

#### Durability

Acoustic Floor Slab Plus are odourless, rot proof, non-hygroscopic, do not sustain vermin and will not encourage the growth of fungi, mould or bacteria. Acoustic Floor Slabs are non-wicking when tested in accordance with BS 2972:1989 Section 12.

#### Application

Acoustic Floor Slab Plus is designed for use as the resilient layer in a Floating Floor Treatment (FFT) and meets the specification requirements in accordance with Robust Details Ltd.

#### Standards

Acoustic Floor Slab Plus are manufactured in accordance with BS EN 13162, ISO 50001 Energy Management Systems, OHSAS 18001 Occupational Health and Safety Management Systems, ISO 14001 Environmental Management Systems, and ISO 9001 Quality Management Systems, as certified by Bureau Veritas.

#### Environmental

Acoustic Floor Slab Plus represent no known threat to the environment and have zero Ozone Depletion Potential and zero Global Warming Potential.

#### Handling and storage

Acoustic Floor Slab Plus are easy to handle and install, being lightweight and easily cut to size, where necessary. They are supplied in polythene packs which are designed for short term protection only. For longer term protection on site, the product should either be stored indoors, or under cover and off the ground. Acoustic Floor Slab Plus should not be left permanently exposed to the elements.



Knauf Insulation mineral wool products made with ECOSE Technology® benefit from a no added formaldehyde binder, which is up to 70% less energy intensive than traditional binders and is made from rapidly renewable bio-based materials instead of petroleum-based chemicals. The technology has been developed for Knauf Insulation's glass and rock mineral wool products, enhancing their environmental credentials without affecting the thermal, acoustic or fire performance. Insulation products made with ECOSE Technology® contain no dye or artificial colours.

#### Knauf Insulation Ltd

PO Box 10, Stafford Road, St.Helens,  
Merseyside, WA10 3NS. UK

Customer Service (sales): +44 (0)1744 766 767  
export.sales@knaufinsulation.com

Technical Support Team: +44 (0)1744 766 666  
technical.uk@knaufinsulation.com

All rights reserved, including those of photomechanical reproduction and storage in electronic media. Extreme caution was observed when putting together and processing the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatever for incorrect information and the consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of possible errors pointed out.

KINE3588DAT - V1117

challenge.  
create.  
care.